
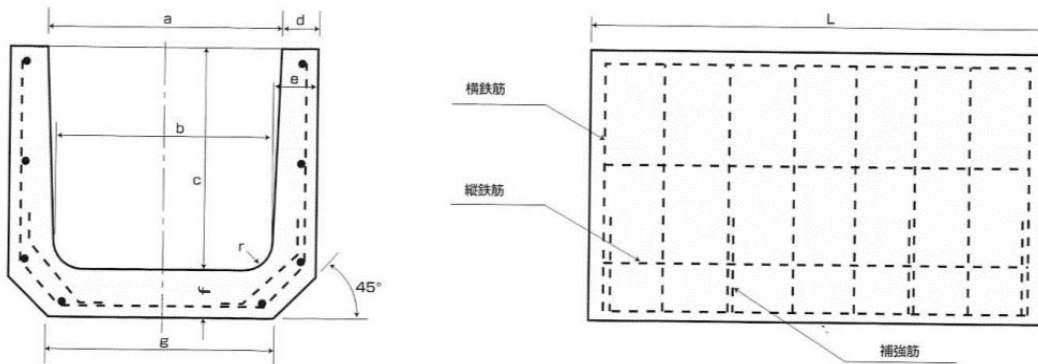




●鉄筋コンクリートU形 JIS A5305

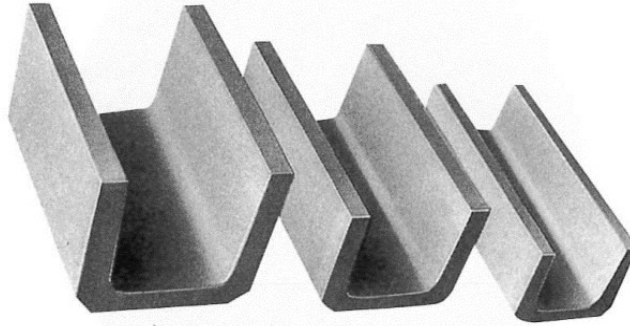

※補強筋は呼び名600のU形についてのみ径6.0mmのものを両側にそれぞれ4箇所入れます。

呼び名	寸 法 (m/m)									鉄 筋				製品重量 (kg)
	a	b	c	d	e	f	g	r	L	縦鉄筋		横鉄筋		
										径	数量(本)	径	数量(本)	
150	150	140	150	30	35	35	160	30	600	2.6	5	2.6	5	25
180	180	170	180	35	40	40	190	50	600	2.6	5	3.2	5	34
240	240	220	240	45	50	50	240	50	600	3.2	7	3.2	5	56
300 A	300	260	240	50	60	60	300	50	600	3.2	9	4.0	5	71
300 B	300	260	300	50	60	60	300	50	600	3.2	9	4.0	5	80
300 C	300	260	360	50	60	65	300	50	600	3.2	11	4.0	7	93
360 A	360	310	300	50	65	65	360	50	600	4.0	11	4.0	6	91
360 B	360	310	360	50	65	65	360	50	600	4.0	11	4.0	8	101
450	450	400	450	55	70	70	430	70	600	4.0	13	5.0	8	136
600	600	540	600	70	80	80	600	70	600	6.0	15	6.0	8	210

●鉄筋コンクリートU形 J1

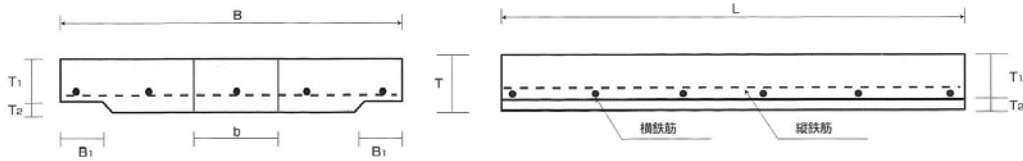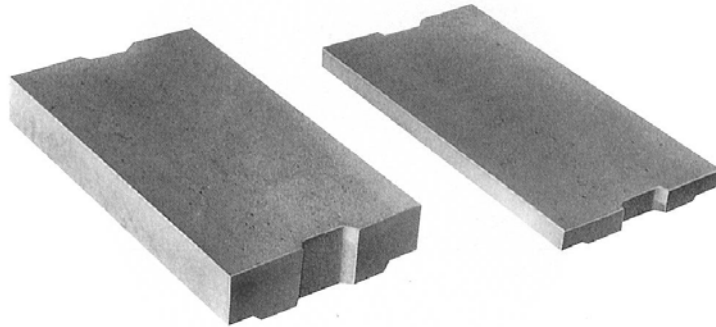

呼び名	寸法 (m/m)									鉄筋				製品重量 (kg)
	B	B ₁	T	T ₁	T ₂	L	r	b	縦鉄筋		横鉄筋			
									径	数量(本)	径	数量(本)		
1種	150	210	35	35	30	5	600	15	75	2.6	3	2.6	5	10
	180	250	40	40	35	5	600	15	75	2.6	3	2.6	6	14
	240	330	50	45	40	5	600	15	90	3.2	4	3.2	6	21
	300	400	55	60	50	10	600	15	100	3.2	4	4.0	6	32
	360	460	55	65	55	10	600	18	120	3.2	4	5.0	6	40
	450	560	60	70	60	10	600	18	120	4.0	5	6.0	5	54
	600	740	75	75	65	10	600	18	150	4.0	6	6.0	6	77
2種	150	210	35	90	80	10	600	15	75	6.0	3	6.0	7	26
	180	250	40	90	80	10	600	15	75	6.0	4	D10	5	31
	240	330	50	100	85	15	600	15	90	6.0	5	D10	5	45
	300	400	55	100	85	15	600	15	100	6.0	6	D10	6	55
	360	460	55	100	85	15	600	18	120	6.0	7	D10	7	64
	450	560	60	120	100	20	600	18	120	D10	6	D10	7	94
	600	740	75	150	130	20	600	18	150	D10	6	D10	6	157